


© Robert Bosch GmbH. Alle Rechte vorbehalten, auch bzgl. jeder Verfügung, Verwertung, Reproduktion, Bearbeitung, Weitergabe sowie fuer den Fall von Schutzrechtsmeldungen.

© Robert Bosch GmbH. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

General Tolerance	Dimension: ±	n.a.	General roughness
acc. to: NA	Angle: ±	n.a.	

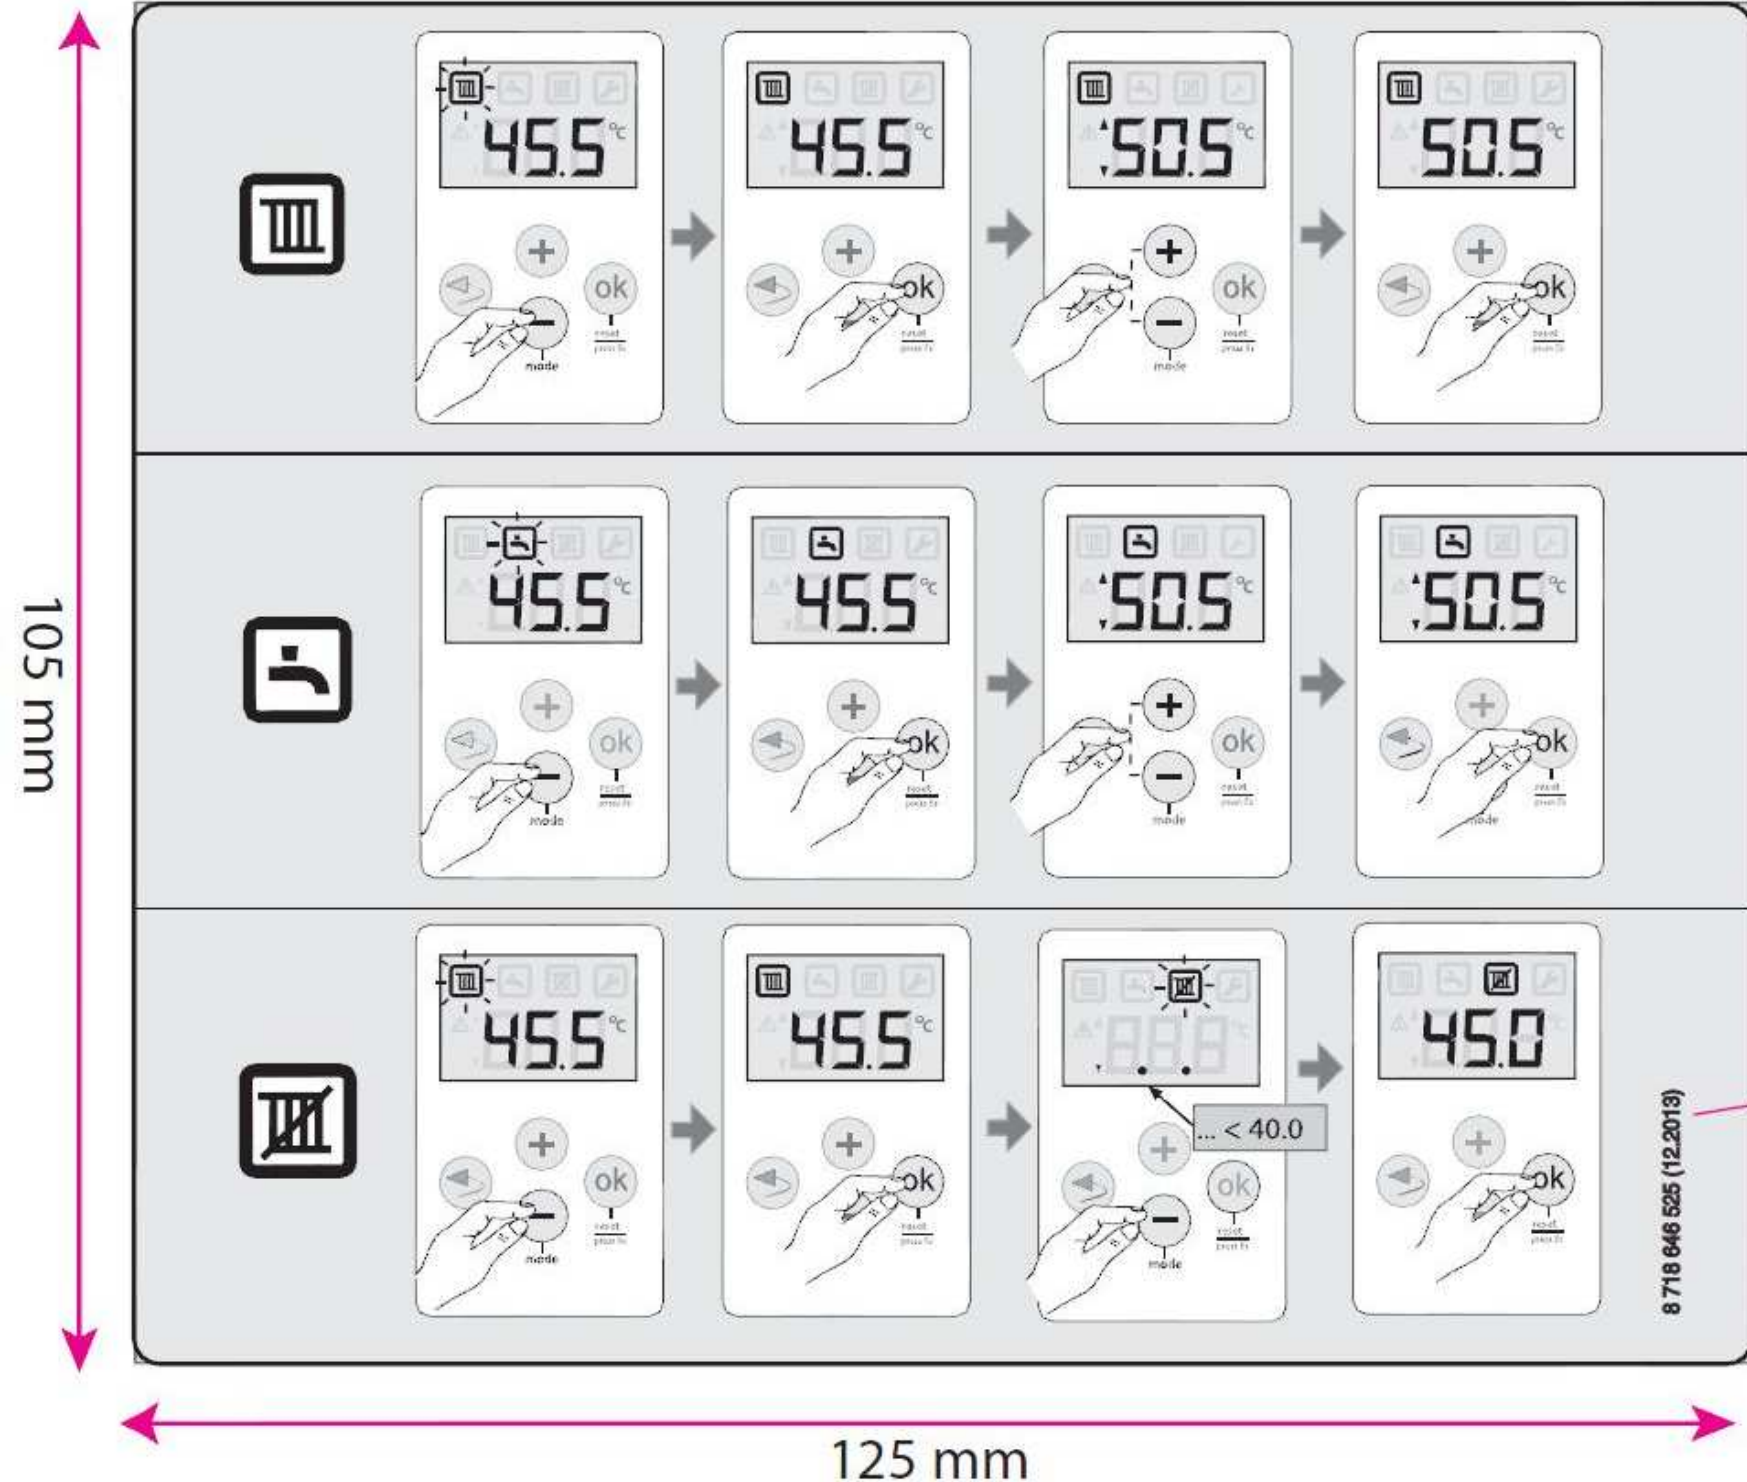

8 718 646 525 (12.2013)
 Helvetica font,
 5 punt,
 yazı yükseklik 1,6 mm

Print Colours : acc. to Original PDF.
 General Tolerance : ± 10 mm
 Operation temperature : 0 - 70 ° C
 Total material thickness : 0.45 + 0.1 mm
 Material : Magnetic strip with opaque PVC sheet

Surface quality of printed surface :
 Acc. to the norm 5 998 488 000
 Appendix B Part 3 Resistance against household-type cleaners
Test procedure:
 Label must be tested on sheet metal (DX51/52/53/54) with 7-12 micron galvanized or Aluminium coating
 Sliding force : 5,5 g/cm² or 465 g/(label area)
 Acceptance criteria: No movement in the label when this force is applied.

Change description							Unit of measure: mm	
Introduction.								
00 8701X01388	20140106	DegirmGo	BozgeyAh	BozgeyAh	829	TT-WB/ENG-Man	0002	
Ind. Change	YYYYMMDD	Drawn	Checked	Releas.	BWN	Resp.dept	Add. info	
Treatment/						Missed Details		
Mat. See drawing						From		
Lang	Wght	BOSCH		Label Quick BOSCH		Sheet		
EN	KG			BOSCH Kolay Kullanım Etiketi		. / 1		
Crit.P	Scale	Mat.meets	Syst.	Doc.type	8 718 646 525	DP/TD	Ind.	
None	None	N2580	UG	DRW		.	00	
MNR 8718646525				Repl. for		Repl. by		